



Optimising TiO_2 in Coatings systems


and

Introducing FP-440

The Next Generation in
FP-Opacity Pigments™ Technology

FP-Pigments are a global manufacturer of opacity pigments and speciality minerals for the coatings, plastics, paper and printing ink markets.

Our innovative, patented products enable the coatings producer to make significant raw material savings while maintaining or improving coating properties.

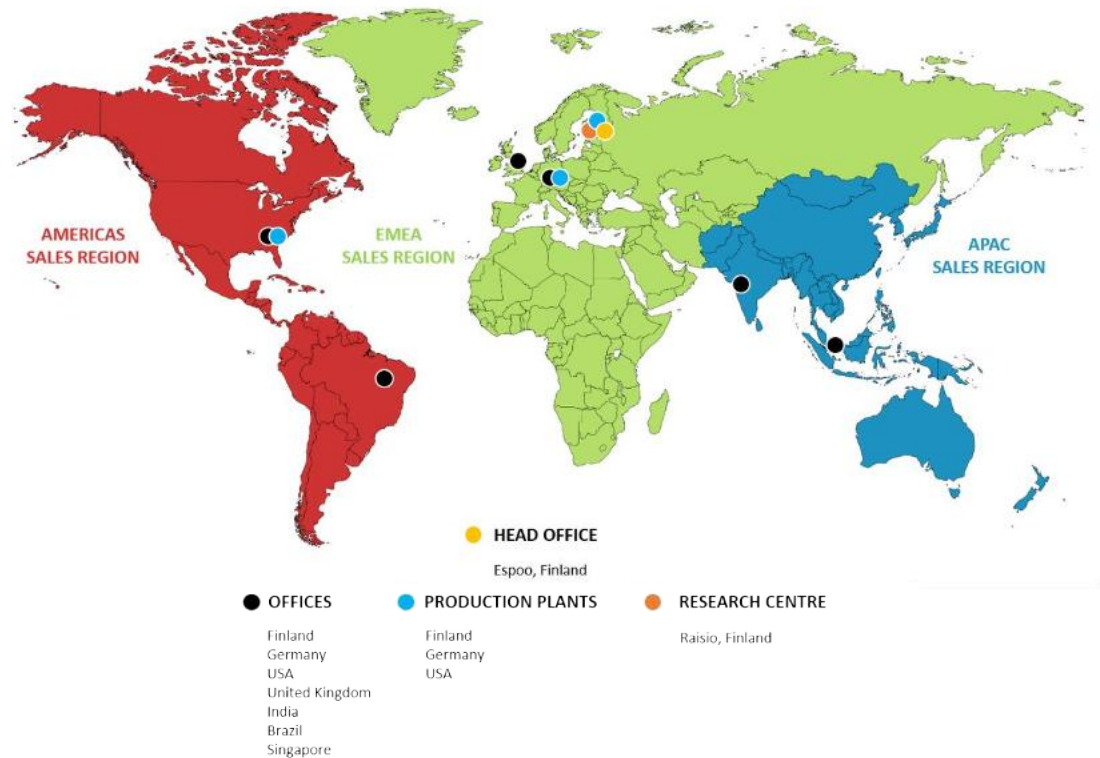


Importance of Refractive Index

For a coating to be opaque (and white) it needs to be able to bend and scatter light before it reaches the substrate.

The bending of light is governed by the refractive index of the various materials in the coating and the differences between them.

For the highest opacity and tint reducing power there is **no** alternative to TiO_2 - this is true especially for wet opacity.


Replacing TiO_2 with Extenders will reduce wet hide and tint strength and will maintain dry opacity only through secondary properties – high medium demand, reduced crowding etc.

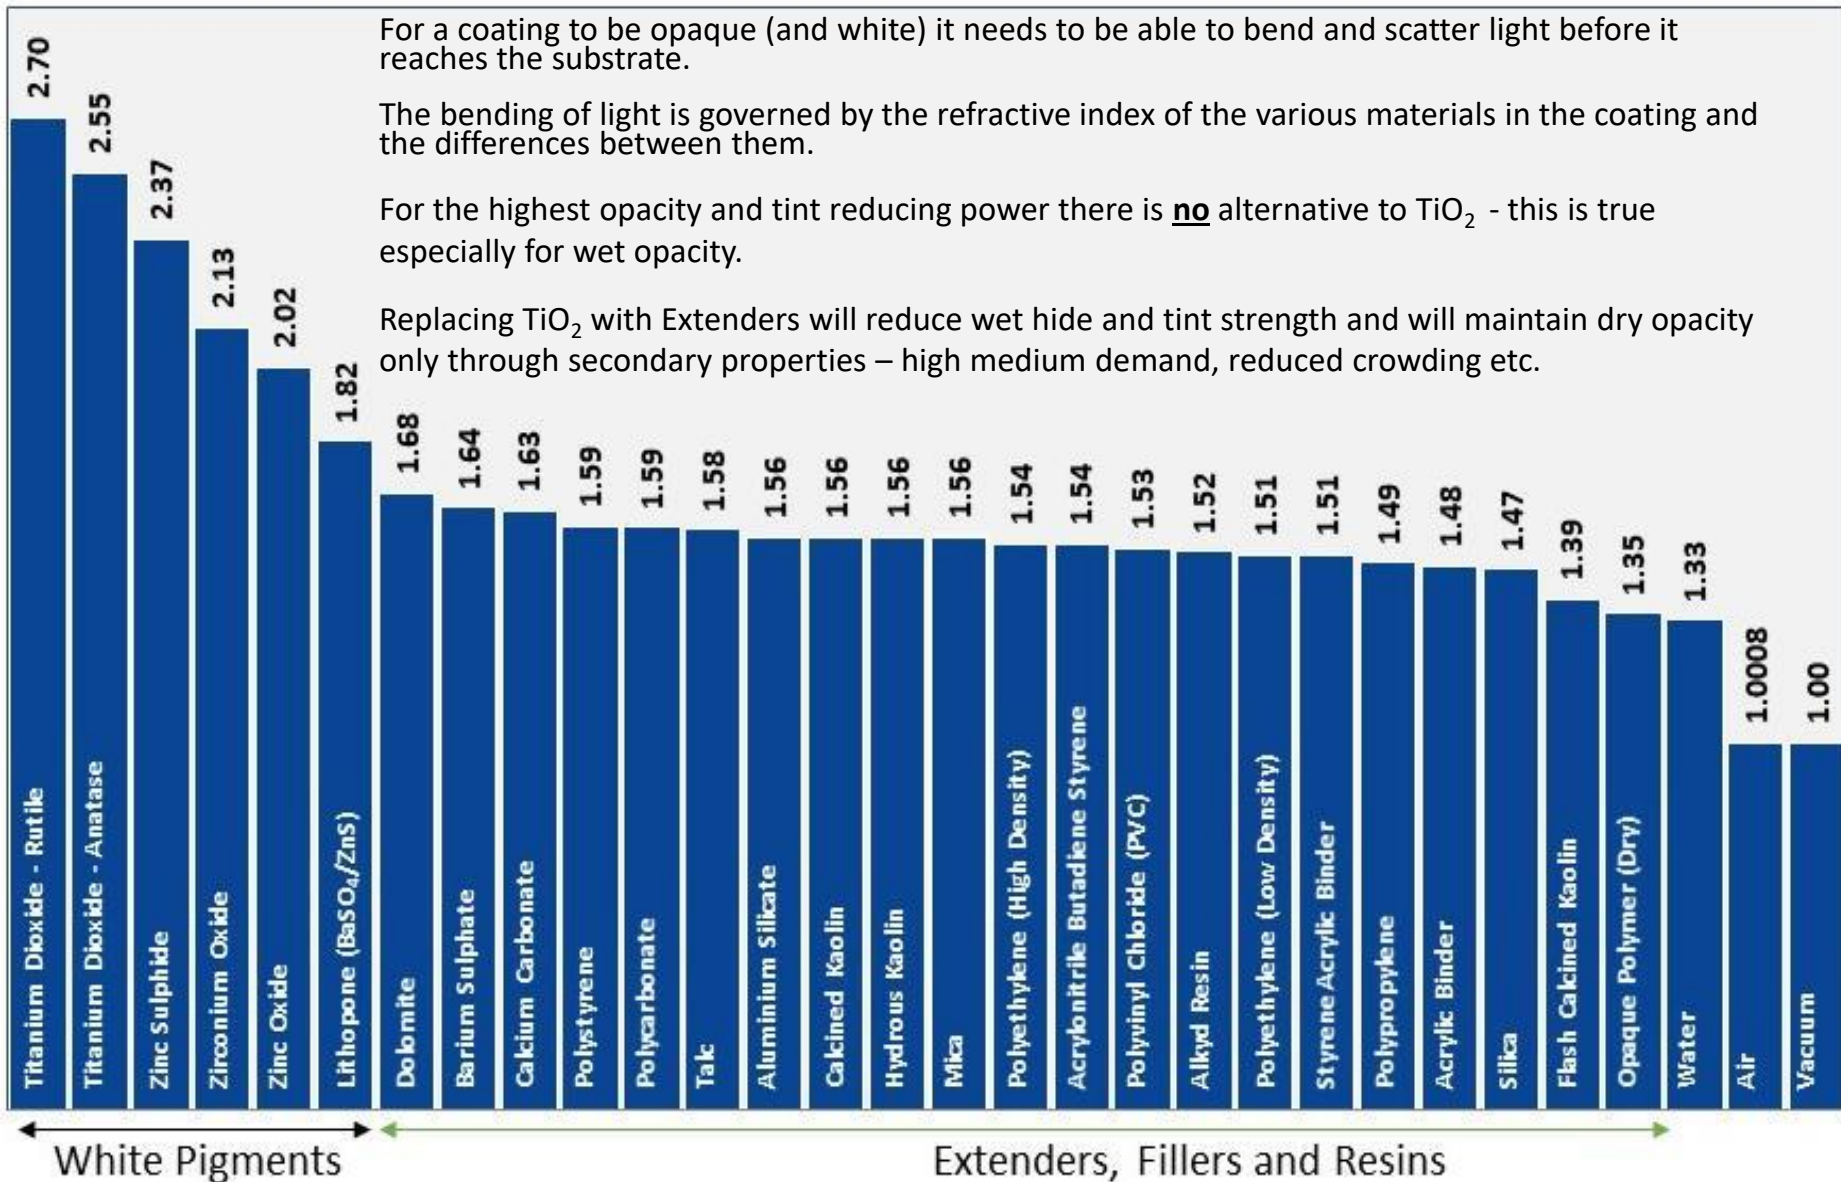

Importance of “Spacing” TiO_2

Inter-particle distance

Less than 1 particle apart

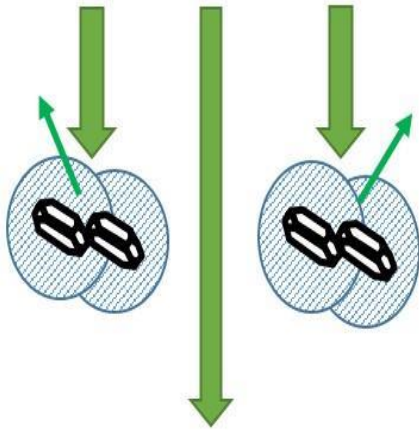


LESS THAN 1 PARTICLE APART



Inefficient scatter as light cannot differentiate between the two particles.

1 particle apart

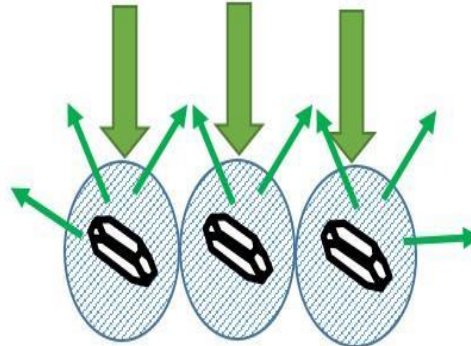


1 PARTICLE APART



Efficient scatter as light can differentiate between the two particles.

more than 1 particle

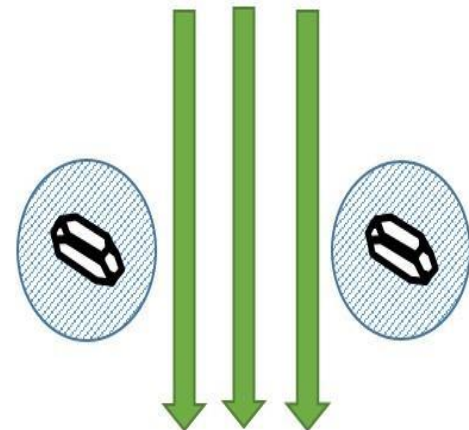


MORE THAN 1 PARTICLE APART



Inefficient scatter as light can pass between the two particles uninfluenced.


TiO₂ Crowding in matt paint films

Cheap, coarse fillers

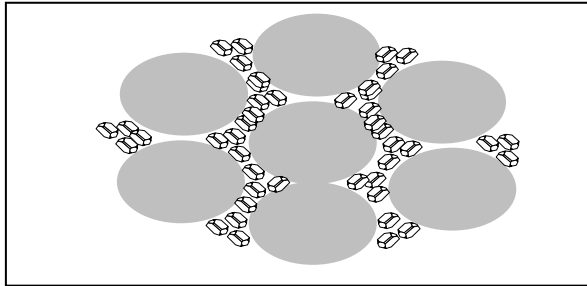



5 μ m Extender

More Expensive, fine extenders

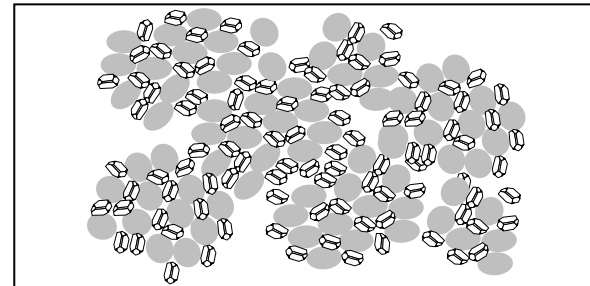


0.8 μ m Extender

Pigment crowding reduces as Extender particle size decreases

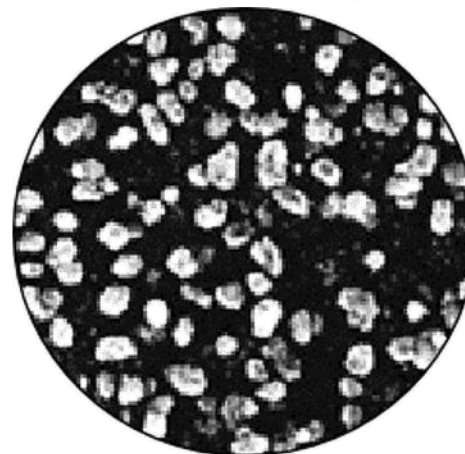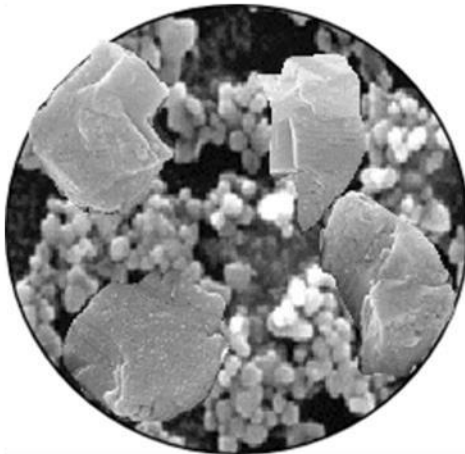


FP-Pigments produce composite pigmentary products for the paints, plastics, inks and paper industries

- These composite pigments are designed to provide significant improvements in the optical properties of coatings whilst maintaining other coating requirements

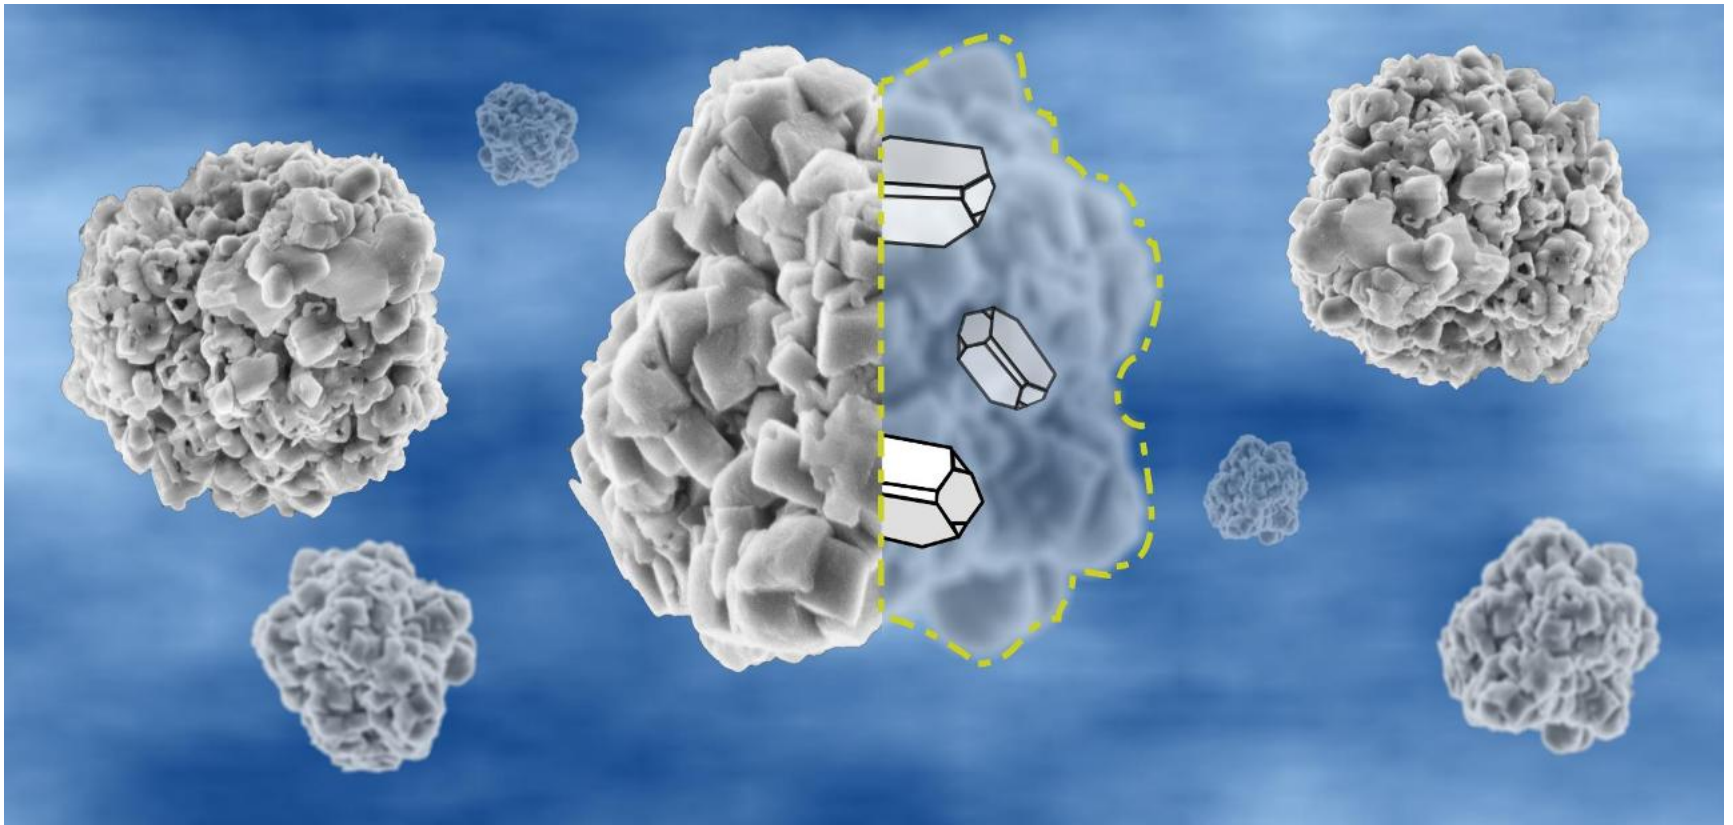


FP-Opacity Pigment™ Design

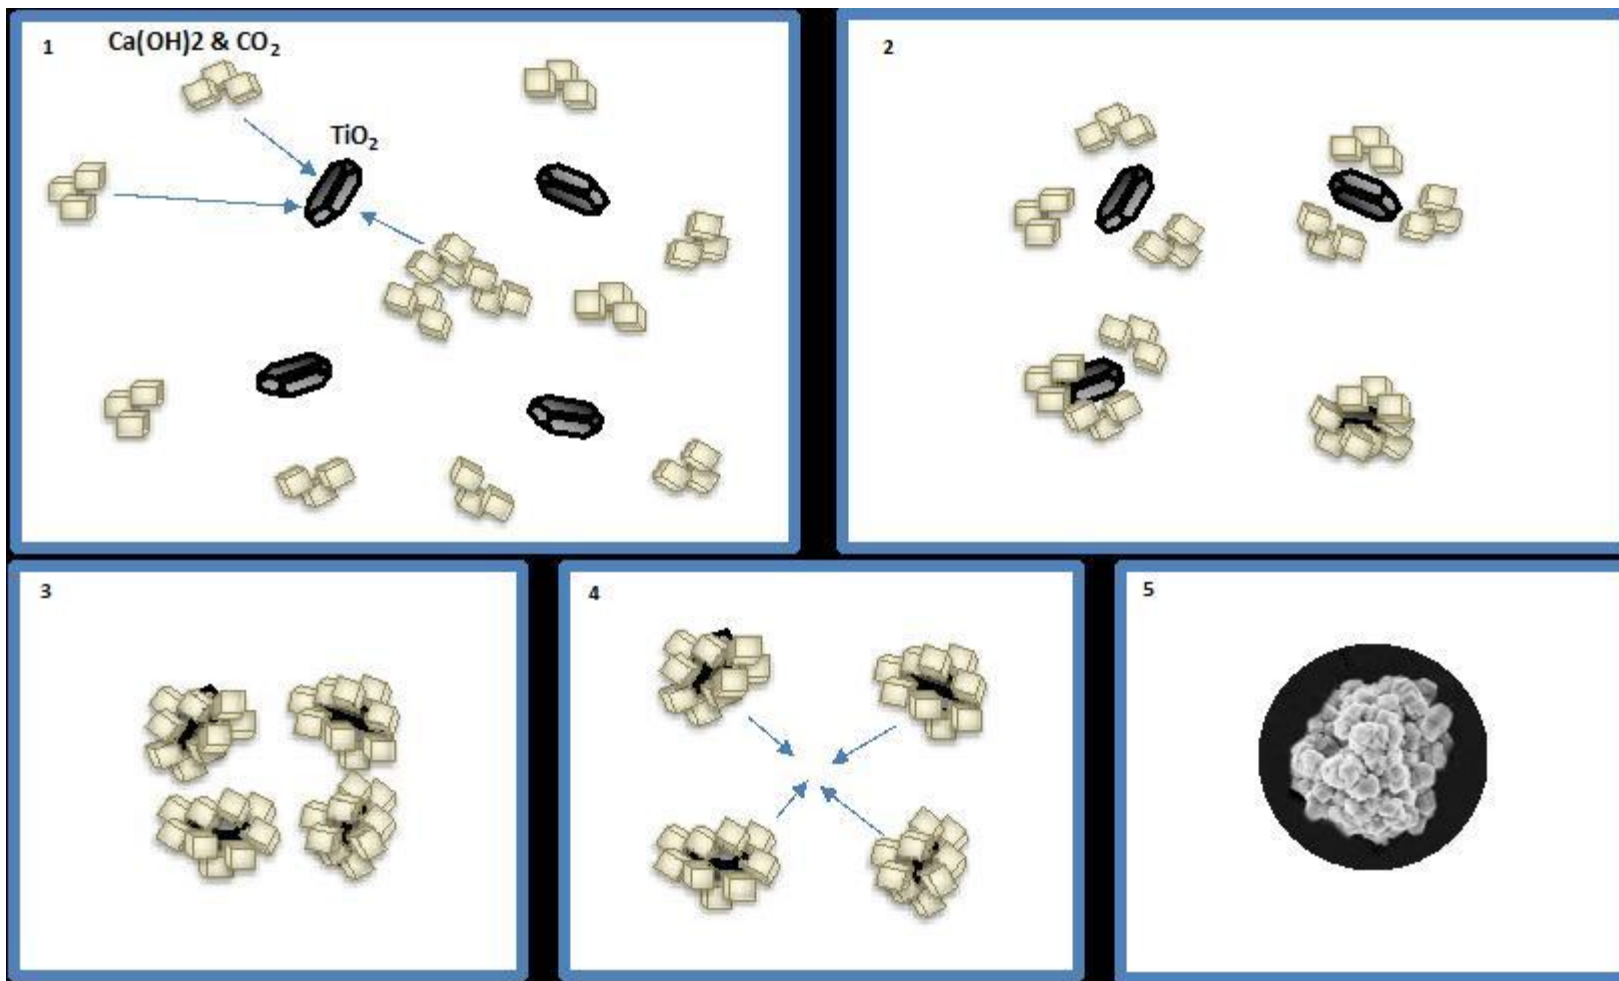

The video of the process can be found at
<https://www.fp-pigments.com/wp-content/uploads/Animation-6.mp4>


SEM Images of Standard and Model Paints

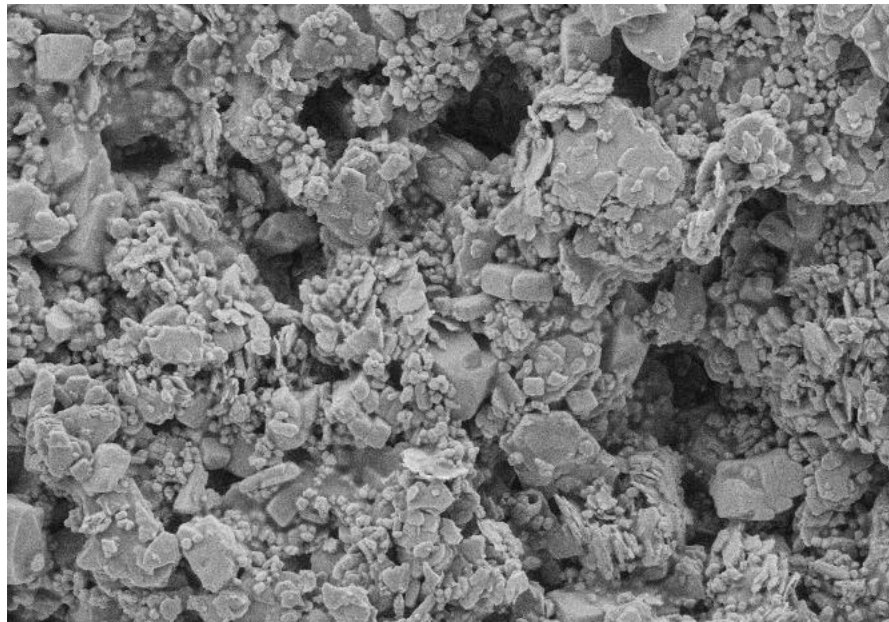

2 μ m LEO 1530 Mag = 5.00 K X EHT = 2.70 kV Aperture Size = 10.00 μ m
WD = 6.4 mm Signal A = SE2 Image Pixel Size = 23.44 nm

High Quality Matt Paint

75% PVC, 10% TiO₂ vc 65% Extender vc: Chalk and Calcined Clay

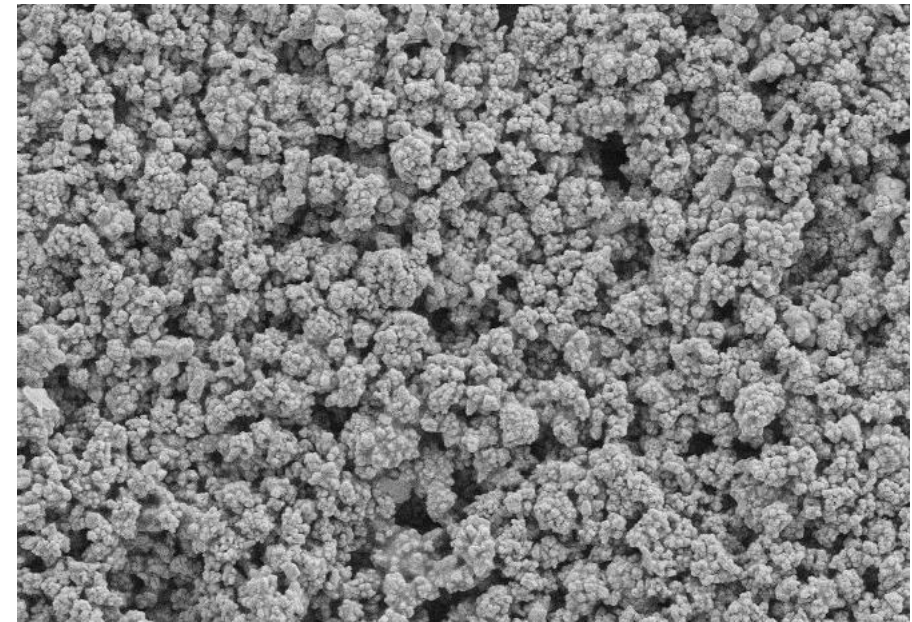


2 μ m LEO 1530 Mag = 5.00 K X EHT = 2.70 kV Aperture Size = 10.00 μ m
WD = 6.4 mm Signal A = SE2 Image Pixel Size = 23.44 nm

FP-Opacity Pigment™ Model Paint


75% PVC, 10% TiO₂ vc, 65% Extender vc: PCC from FP-Opacity Pigment™ Composite

	Standard	FP-Opacity Pigment™
Contrast Ratio @15m ² /l	96.7	98.2
Spreading Rate @ CR=98%	11.4	15.9
Scatter	144	234
Scatter per unit TiO ₂	17	26

TiO₂ Distribution Analysis

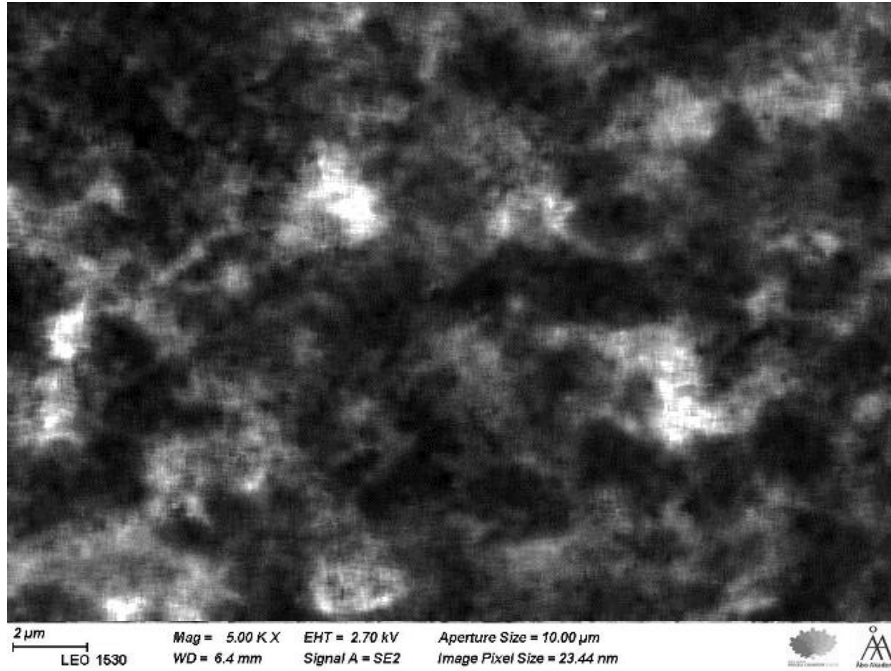


High Quality Matt Paint
Elemental Mapping (Ti Analysis)

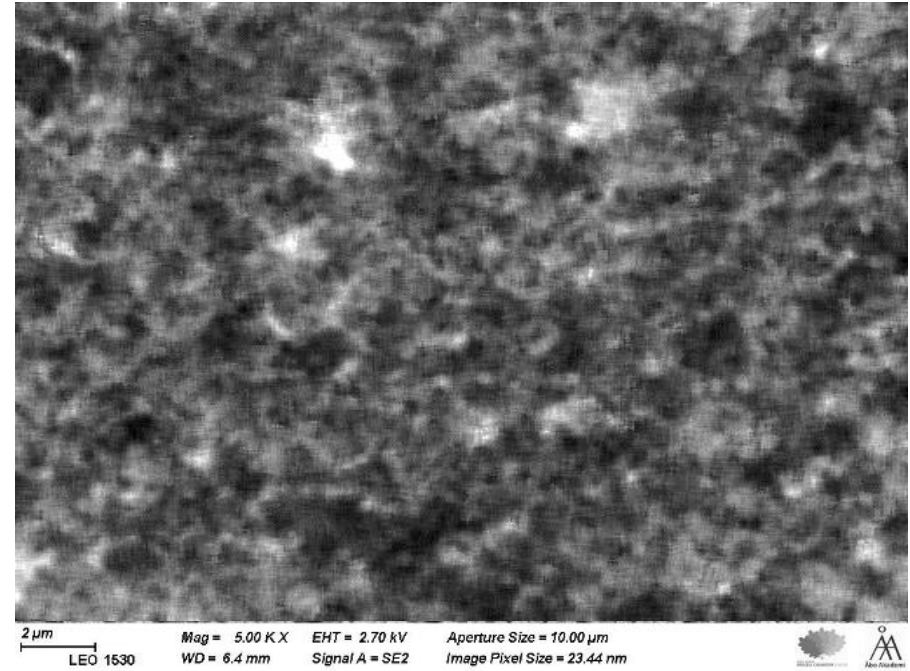

High Quality Matt Paint
Elemental Mapping (Ti Analysis)

	Standard	FP-Opacity Pigment™
Contrast Ratio @15m ² /l	96.7	98.2
Spreading Rate @ CR=98%	11.4	15.9
Scatter	144	234
Scatter per unit TiO ₂	17	26

FP-Pigments – New Development FP-440

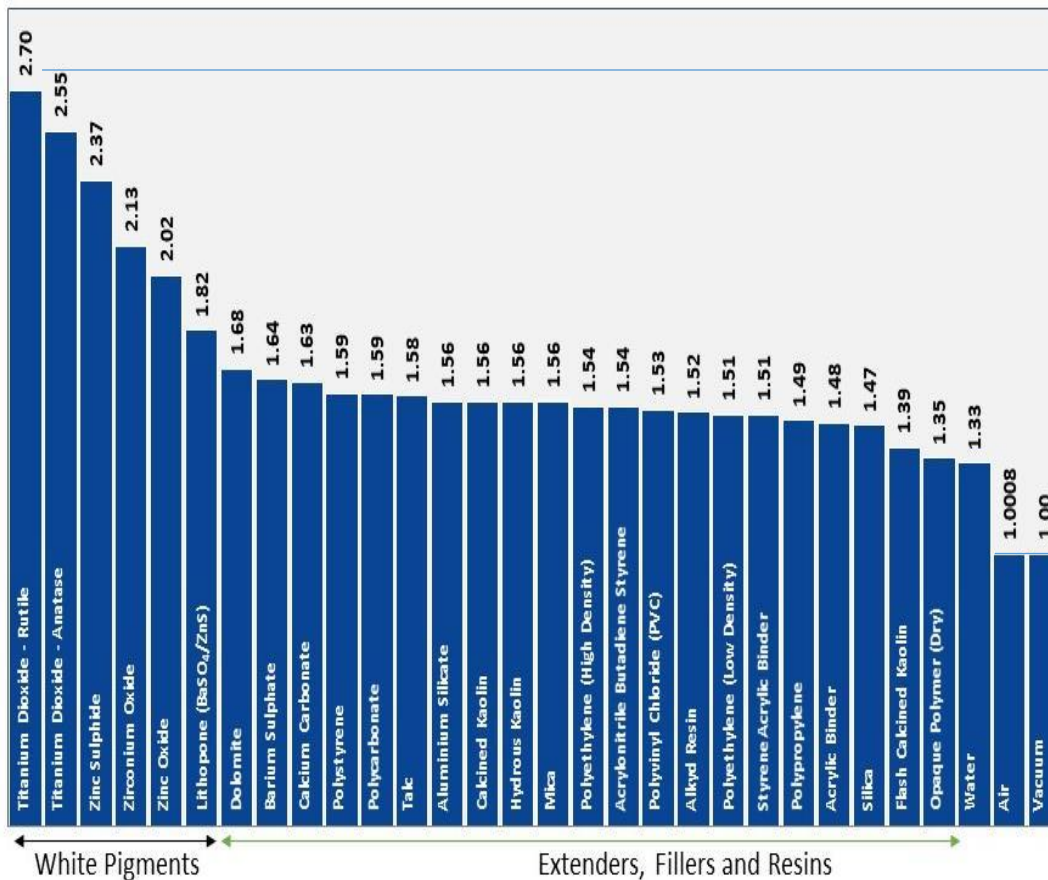

It is well understood that the difference in refractive index is a major influence on light scatter.

High PVC Paints rely on it.


The optimum difference that can realistically be achieved is between Rutile TiO₂ and Air.

FP-Pigments R&D looked to combine our proprietary and original particle spacing technology with the management of air inclusions inside our stable manufactured FP-Pigments particle.


A new product was thus launched in 2020.

FP-Pigments FP-440

In 2020, FP-Pigments introduced some new process changes which have enabled us to make particles with an improved uniform size and which contained additional entrapped air alongside the optimally spaced TiO_2 . Together, these improvements have further enhanced the scatter per unit TiO_2 employed.

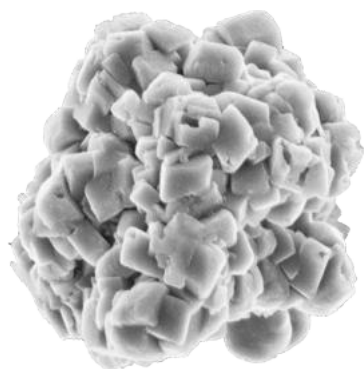


Original
Opacity Pigment™

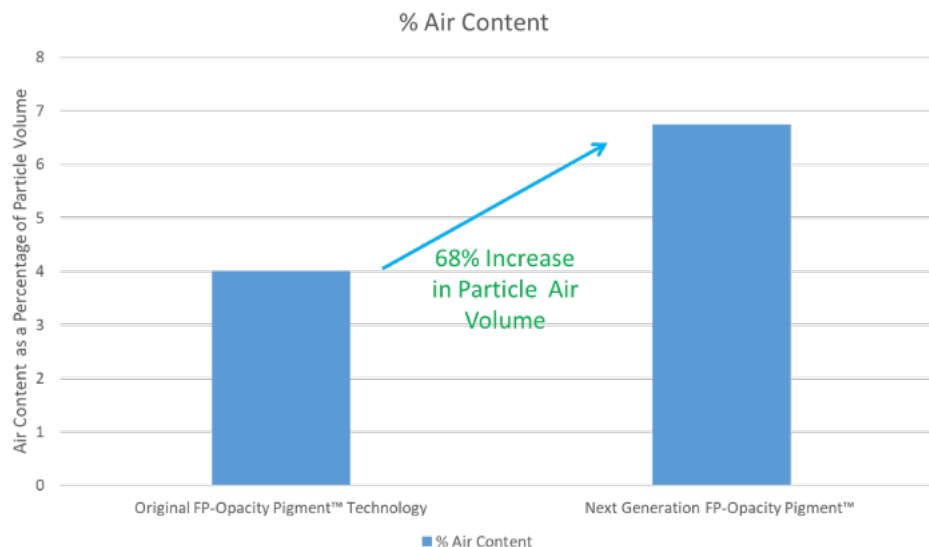

Next Generation
Opacity Pigment™

FP-440 is one of the first products of this next generation family of FP-Opacity Pigments™ - specifically designed™ to enhance the amount of air and the air/ TiO_2 ratio in the particle to produce the optimum light scatter for the minimum TiO_2 used.


Effect of incorporated air on Scatter

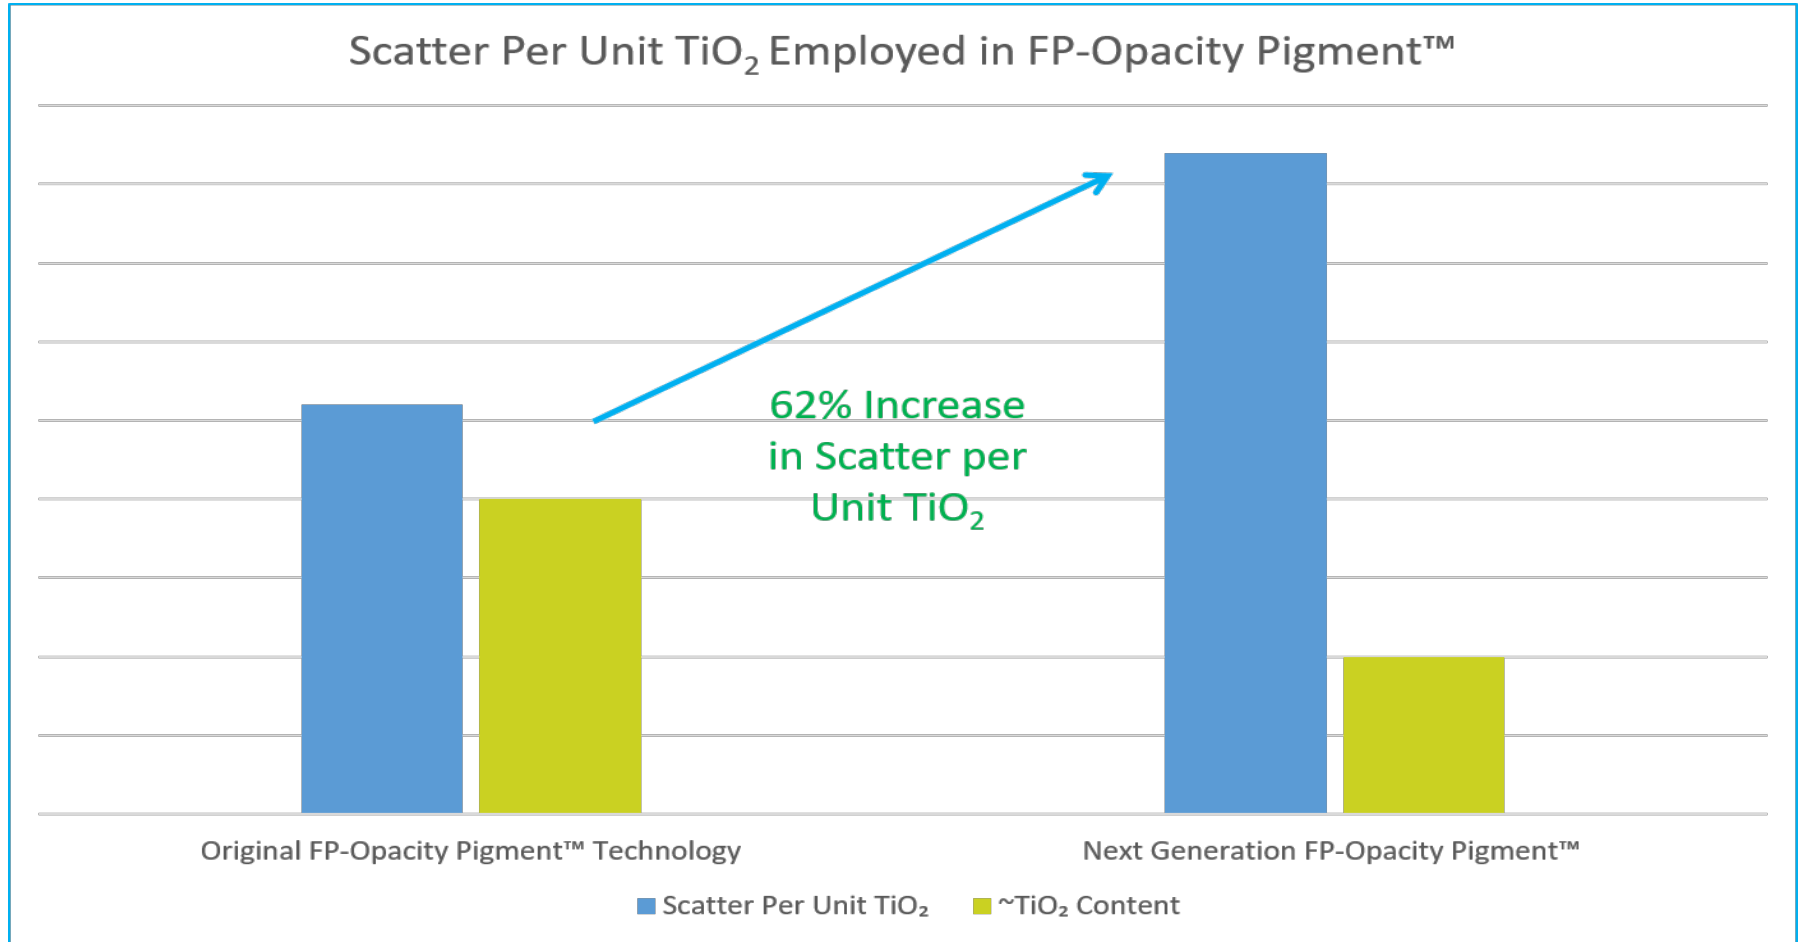

FP-440 is thus designed to give the same level of performance as FP-460 in High PVC Paints, Powder Coatings and certain plastics applications. All at a lower TiO₂ level and hence lower cost

European High Quality Interior Matt

PVC	TiO ₂ wt%	Extenders used
68%	10%	GCC, Calcined Clay

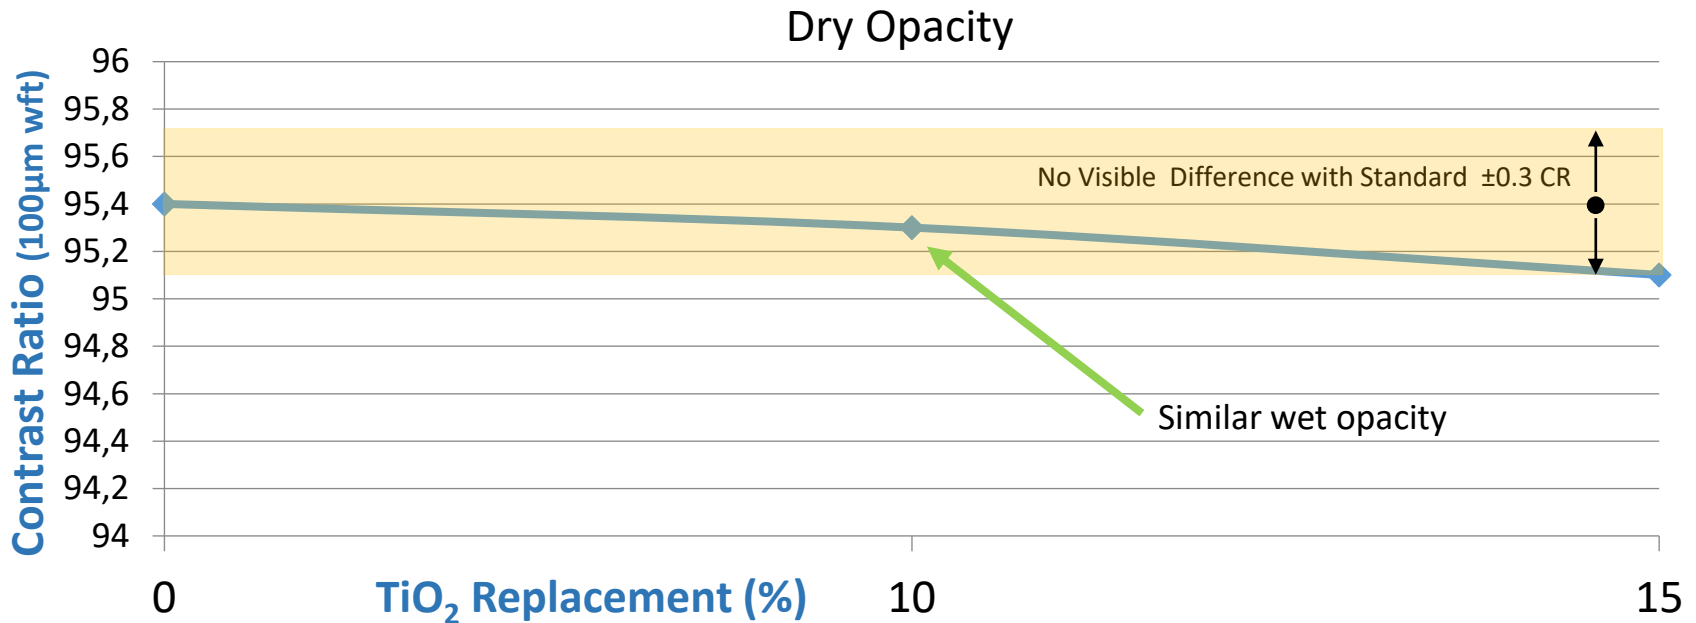


10%-15% replacement of TiO₂ gives similar dry opacity at an estimated cost saving of ~0.02-0.03 Euro/L

	CR 10% _R	CR 15% _R	WH 10% _R	WH 15% _R
Std	95.4	95.4	47.4	47.4
FP-440	95.3	95.1	47.1	46.9

Typical DIY Matt Product

PVC	TiO ₂ wt%	Extenders used
79.6%	5	GCC, Calcined Clay, Kaolin

Dry Opacity

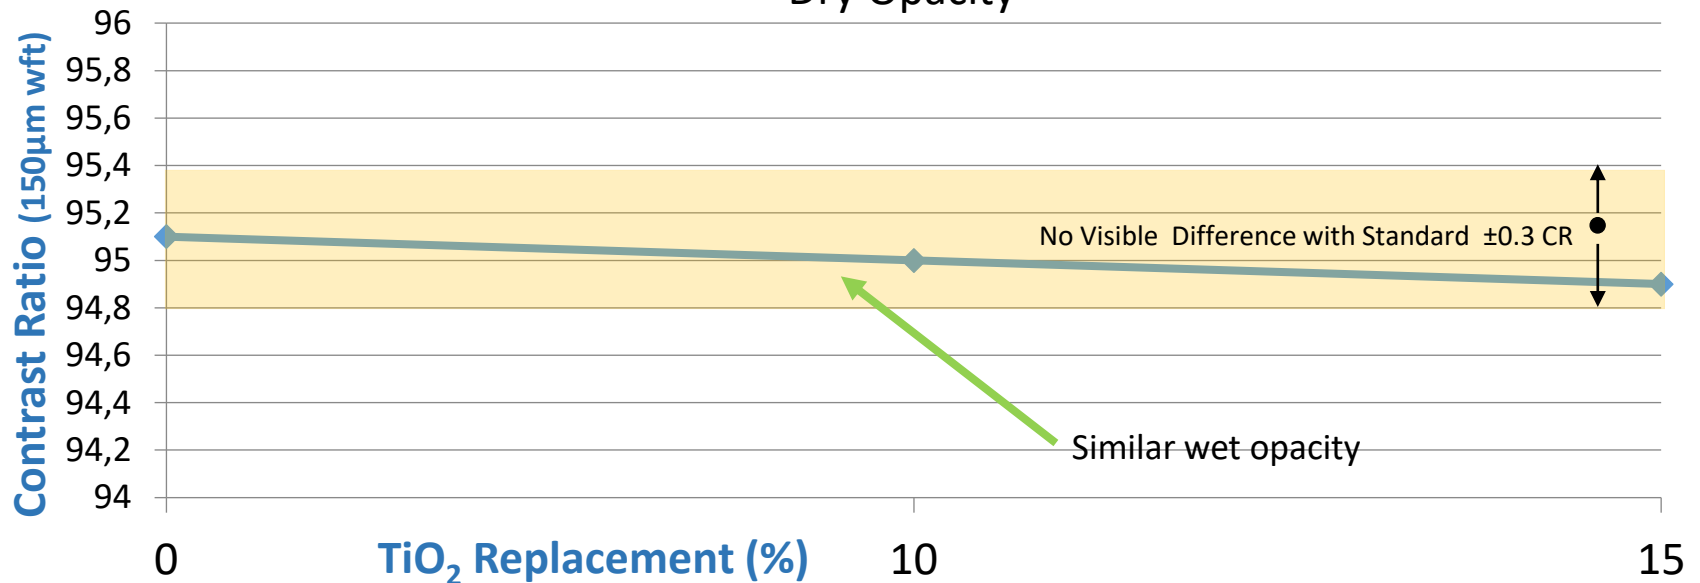


10% and 15% replacement of TiO₂ gives similar dry opacity an estimated cost saving of 0.01-0.02 Euro/L

	CR 10% _R	CR 15% _R	WH 10% _R	WH 15% _R
Std	95.1	95.1	46.4	46.4
FP-440	95.0	94.9	46.0	45.9

Distemper/Economy Paint

PVC	TiO ₂ wt%	Extenders used
92.9%	0.5	GCC, Calcined Clay, Kaolin, Talc


Dry Opacity

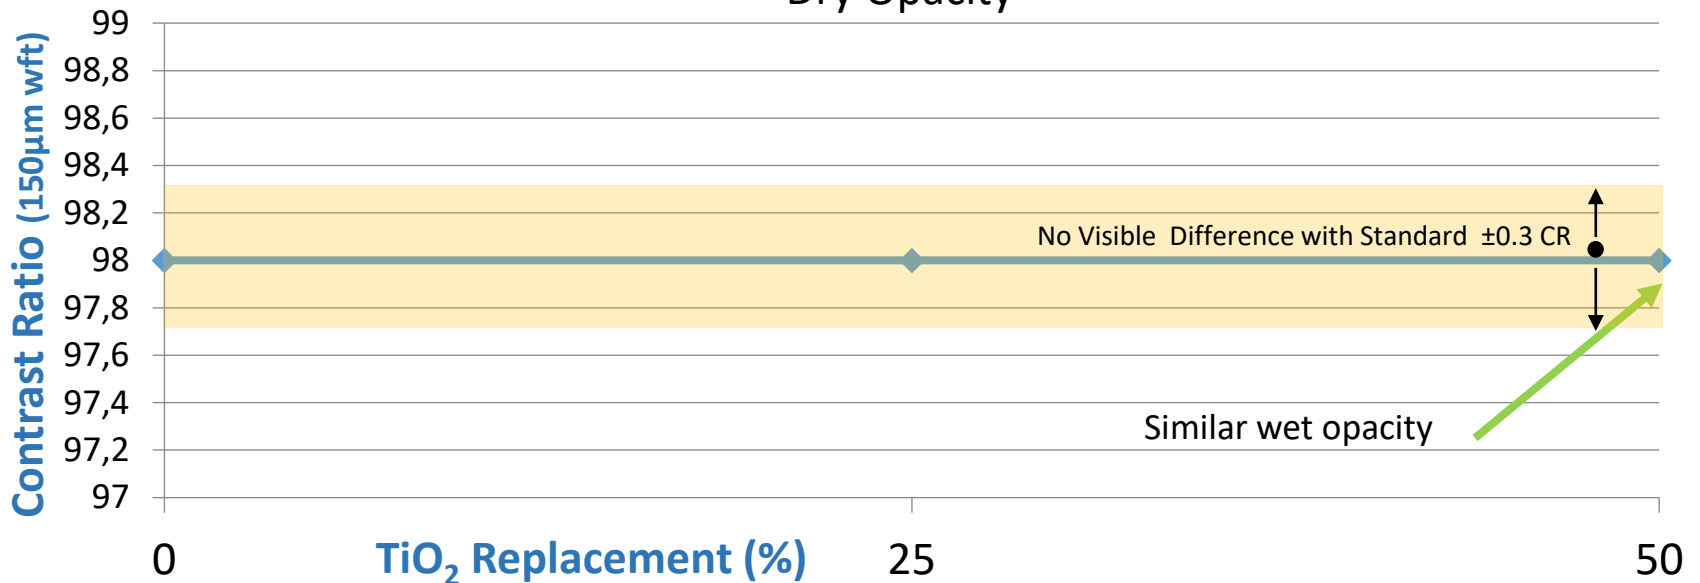


25% and 50% replacement of TiO₂ gives similar dry opacity an estimated cost saving of 0.06-0.07 Euro/L

	CR 25% _R	CR 50% _R	WH 25% _R	WH 50% _R
Std	98.0	98.0	36.3	36.3
FP-440	98.0	98.0	36.6	36.4

FP replacement ratios across a range of formulations

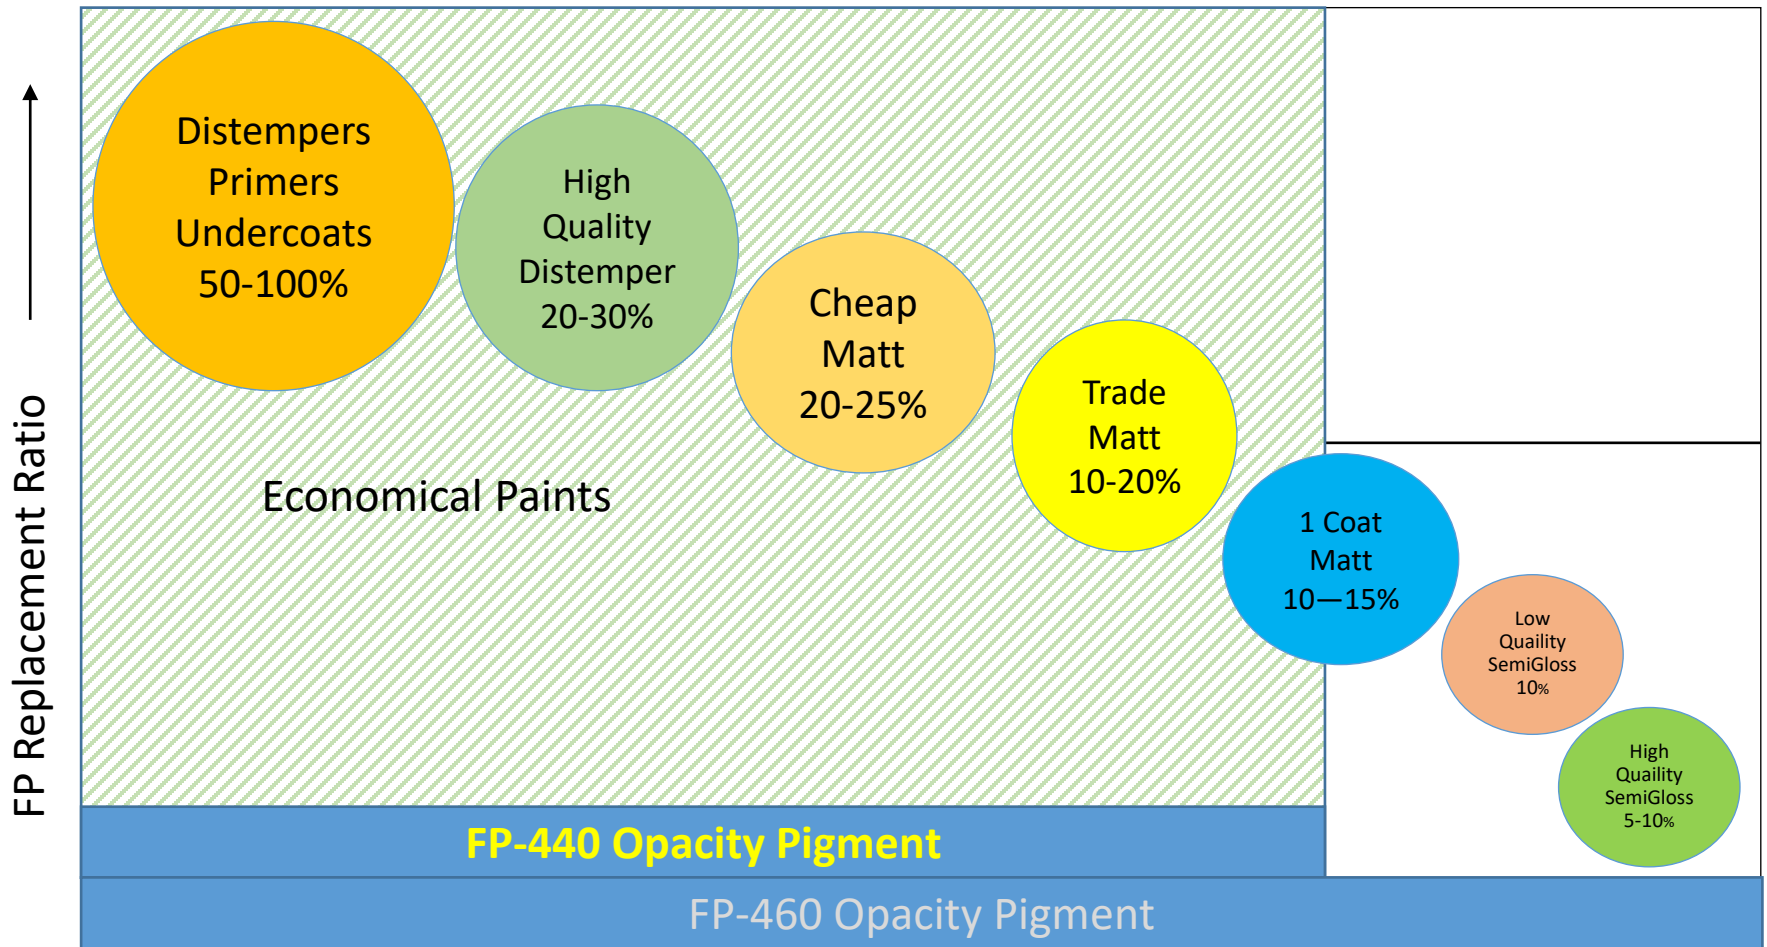


Powder Coatings - Opacity

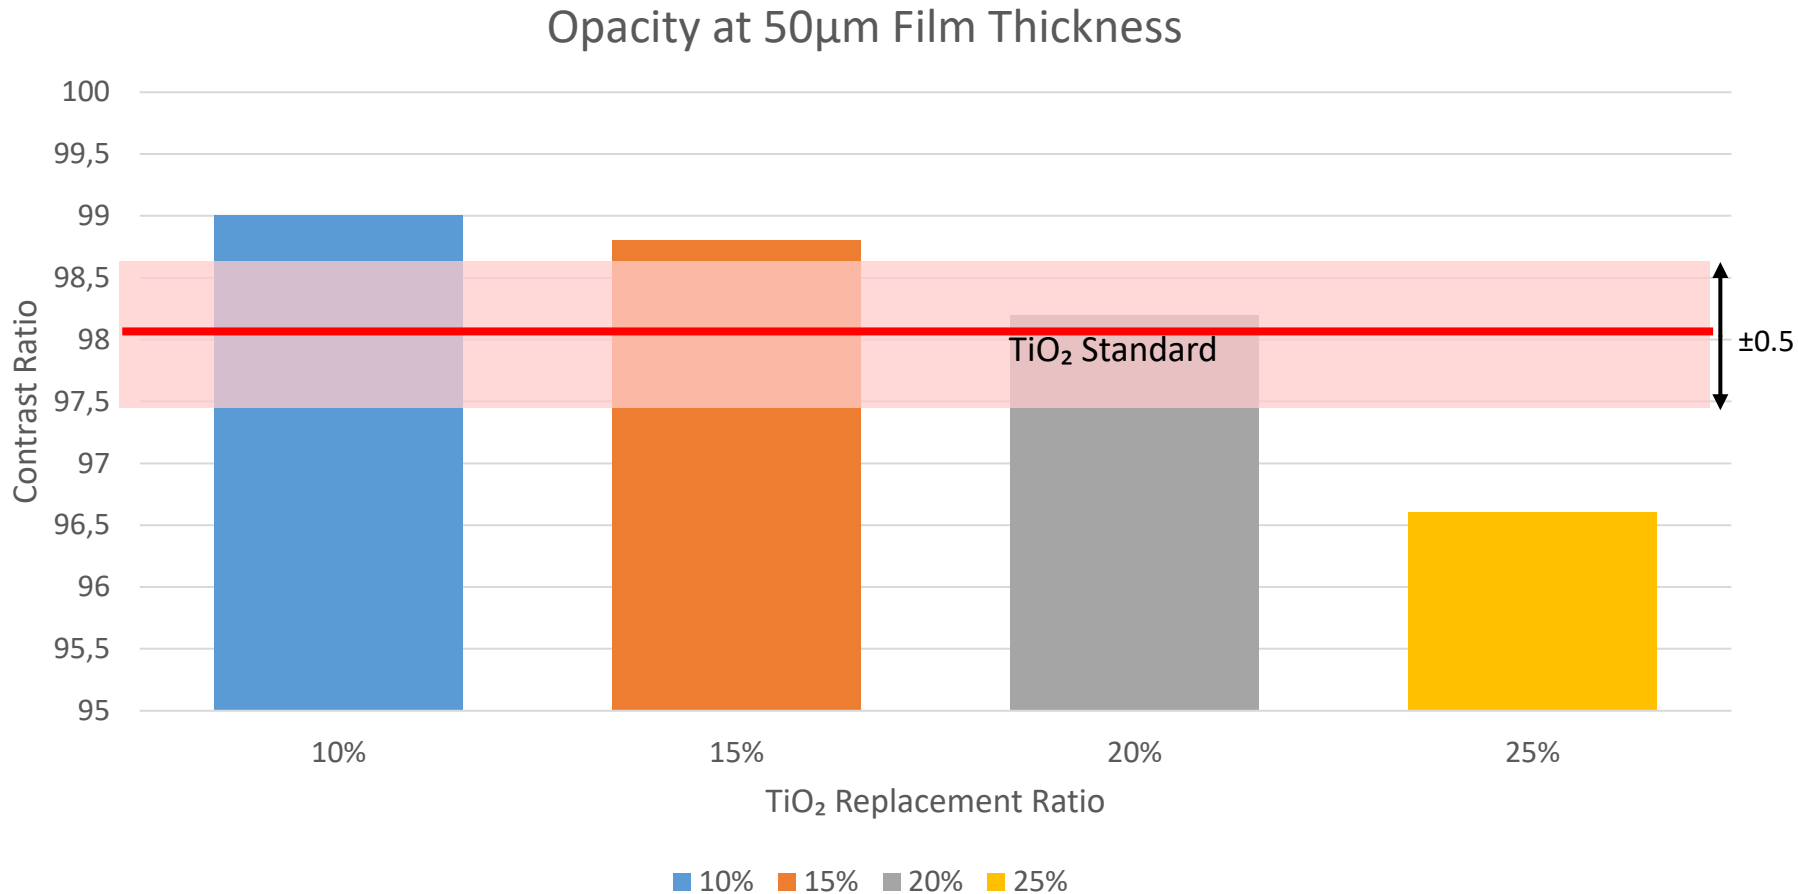

The use of FP-Pigment in powder coatings initially improves the opacity. 10-20% replacement is possible before the opacity starts to reduce.

Cost Advantage of Using FP-Opacity Pigment™

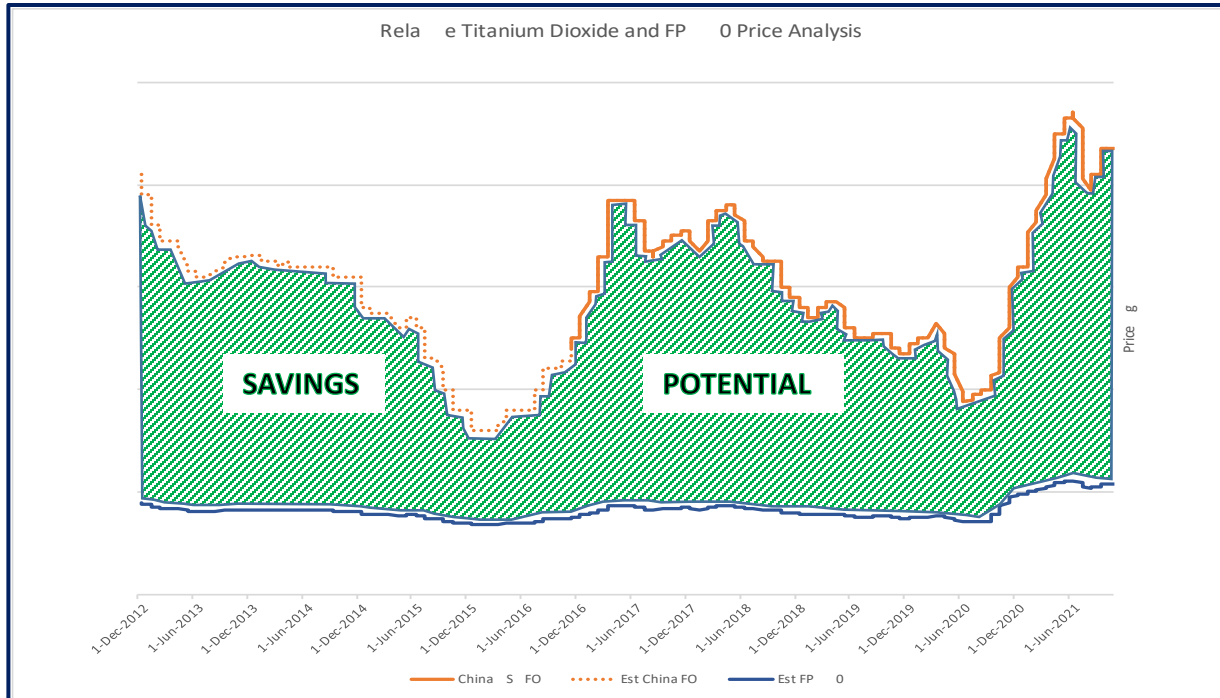

Titanium Dioxide price varies over time, often increasing very rapidly. FP-440 Opacity Pigment™, whilst providing equivalent performance in these formulations, is almost immune to these market fluctuations. The potential savings will depend on the TiO₂ replacement ratio achieved.

- The carbon footprint , cradle to gate, was externally assessed in accordance with the LCA Standards ISO 14040 and ISO 14044.
- Using figures for the carbon footprint of titanium dioxide published by the Titanium Dioxide Manufacturers Association together with figures from the Ecoinvent database, we have calculated the level of carbon dioxide released when manufacturing FP-Pigments Opacity Pigment.

**Carbon Dioxide Emissions
for
FP-440 Opacity Pigment™
are
1.6 t CO₂ / t of FP-440**

**A 67% Reduction in Carbon Footprint
compared to a tonne of TiO₂**



FP-Pigment in various coatings applications.

- ✓ No compromise on Opacity and Whiteness
- ✓ Significantly Lower cost across the TiO_2 price cycle.
- ✓ Improved output for the same amount of TiO_2
- ✓ Lower Carbon Footprint

Thank You!

© 2022 FP-Pigments, Oy

